


19-DTC Double Tank Controller

PRODUCT DESCRIPTION

This model is used to maintain water level in Two water tanks. It will switch ON pump if any one of the tank water level becomes below its minimum level and switches OFF the pump if both tanks reach their maximum water levels. By this, it operates the water pump fully automatic and maintains the water level in both water tanks. It monitors both tank water flowing conditions while the pump is ON, in this way it provides. Dry-run protection to pump. Two level indication for each tank, that is low level and the high level of the tank shall be indicated in the front display of the controller. We offer this model in single phase and three phases to suit all types of pumps like Jet Pumps, Monoblock Pumps, Submersible Pumps & Compressor Pumps

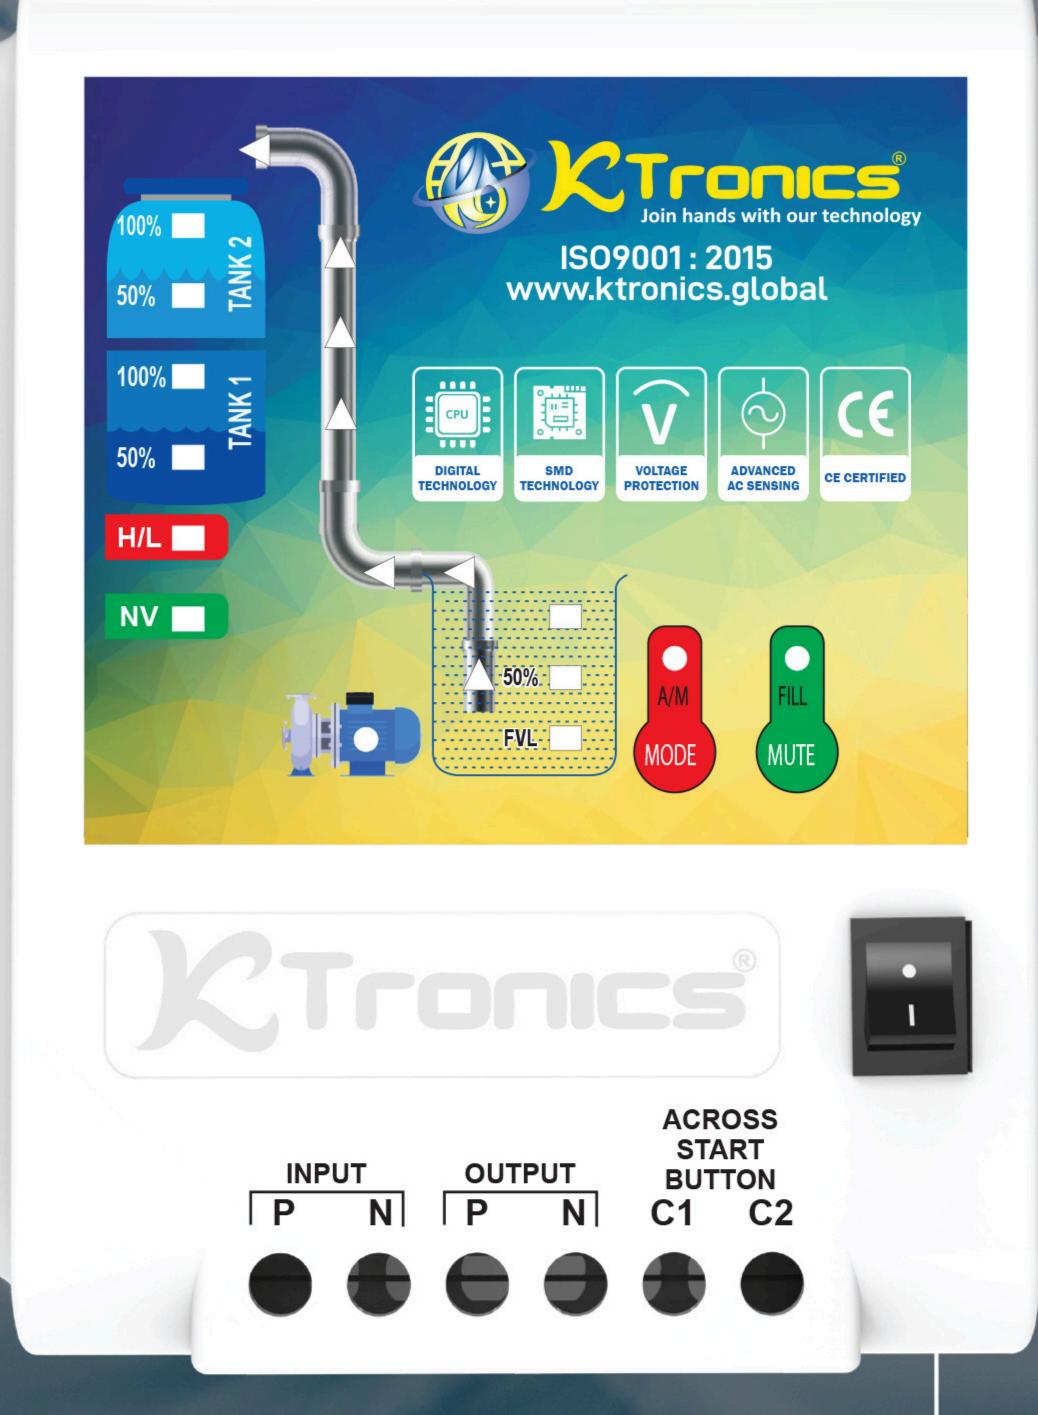

FEATURES

- * Real-time level indication for Two tanks
- * 4 level indication Tank 1 (50% & 100%), Tank 2 (50% & 100 %)
- * 3 level indication for UG SumpTank (FVL,50,100%)
- * Fully / Semi-automatic operation
- * Voltage surge protection
- * Dry run protection
- * Auto / Manual mode
- * Fill option to start the motor manually @ any level.
- * Mute option for Buzzer
- * Rocker Switches for Auto / Bypass Function
- * In-Built Relay 30-40A
- * Wall Mountable & ABS Design
- * SS-316 grade Anticorrosion Sensors

